

FORM PTO-1390
OFFICE
(REV. 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK

ATTORNEY'S DOCKET NUMBER

45900-000713

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

NEW
10/018065TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

INTERNATIONAL APPLICATION NO.

PCT/DK00/00298

INTERNATIONAL FILING DATE

31 May 2000 (31.05.00)

PRIORITY DATE CLAIMED

10 June 1999 (10.06.99)

TITLE OF INVENTION

ENCODER

APPLICANT(S) FOR DO/EO/US

Martin Bondo JØRGENSEN, Søren RAVNKILDE

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39 (1).
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau). WO 00/77806A1
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☒ is transmitted herewith. (15 pgs. w/ cover sheet)
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4)
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☒ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 20. below concern document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98-1449 and International Search Report (PCT/ISA/210).
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821-1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☒ Other items or information: Five (5) sheets of drawings; Notification of the Recording of a Change; Notification Concerning Submission or Transmittal of Priority Document; Express Mail Transmittal; and Itemized Postcard

JC05 Rec'd PCT/PTO 1 0 DEC 2001

U.S. APPLICATION NO (if known, see 37 CFR 1.5) 10/018065		INTERNATIONAL APPLICATION NO PCT/DK00/00298		ATTORNEY'S DOCKET NUMBER 45900-000712	
--	--	--	--	--	--

21. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO. \$1,040.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO. \$710.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4). \$690.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4). \$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th colspan="2" style="text-align: left;">CALCULATIONS</th> <th style="text-align: left;">PTO USE ONLY</th> </tr> <tr> <td style="width:50%;"></td> <td style="width:25%;"></td> <td style="width:25%;"></td> </tr> <tr> <td>\$</td> <td>\$890.00</td> <td></td> </tr> <tr> <td>\$</td> <td>\$130.00</td> <td></td> </tr> </table>		CALCULATIONS		PTO USE ONLY				\$	\$890.00		\$	\$130.00	
CALCULATIONS		PTO USE ONLY												
\$	\$890.00													
\$	\$130.00													

Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	\$130.00	
--	--	--	--	----	----------	--

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE			
Total Claims	16 - 20 =		X \$18.00	\$	0	
Independent Claims	2 - 3 =		X \$84.00	\$	0	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$280.00	\$	0	
TOTAL OF ABOVE CALCULATIONS =				\$	\$1020.00	

<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$	0	
SUBTOTAL =				\$	\$1020.00	

Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)). +				\$	0	
TOTAL NATIONAL FEE =				\$	\$1020.00	

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +				\$	0	
TOTAL FEES ENCLOSED =				\$	\$1020.00	

				Amount to be:	
				Refunded	\$
				Charged	\$

a. ☐ A check in the amount of \$ _____ to cover the above fees is enclosed.

b. ☒ Please charge my Deposit Account. No. 08-0750 in the amount of \$1020.00 to cover the above fees.
 A triplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 08-0750.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

Send all correspondence to:
Harness, Dickey & Pierce, P.L.C – Customer No. 30596
Post Office Box 8910
Reston, Virginia 20195
United States of America

By John A. Castellano
 For John A. Castellano, Reg. No. 35,094 #37275
 Date 12/10/01

10016065 .071802
10/018065
JCO5 Rec'd PCT/PTO 1 0 DEC 2001

PATENT
45900-000712

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Application No.: Not yet assigned
Filing Date: December 10, 2001
Applicant: JØRGENSEN, Martin Bondo, et al.
Title: ENCODER
Attorney Docket: 45900-000712

PRELIMINARY AMENDMENT

Box PCT
Hon. Commissioner of Patents and Trademarks
Washington, D.C. 20231

Sir:

Applicants submit this Preliminary Amendment to the application filed herewith, for consideration prior to the calculation of the filing fee, as follows:

IN THE ABSTRACT

Please see the Abstract attached hereto on a separate sheet.

IN THE CLAIMS

Please cancel claims 1 through 16 and replace with Claims 17 through 32.

17. (New) An encoder-switch assembly comprising,
a first member, said first member being supported by a frame and being rotatably mounted in relation to the frame, the frame having a first part and a second part, the first part being adapted to support the first member and being displaceable relative to the second part so as to render

JØRGENSEN

2

the first member displaceable in relation to the second part from an initial position to a displaced position,

a coding member engaging the first member in a manner so as to rotate when the first member rotates,

means for returning the first member from the displaced position to the initial position, said returning means being made from a plate-shaped resilient material and being constituted by the frame,

means for detecting rotation of the coding member in relation to the frame, and

switching means for indicating when the first member is in the displaced position.

18. (New) An encoder-switch assembly according to claim 1, wherein the frame is made from a plate-shaped resilient material.

19. (New) An encoder-switch assembly according to claim 1, wherein the first part and the second part of the frame are separated by one or more indentations.

20. (New) An encoder-switch assembly according to claim 1, wherein the second part of the frame further comprises engaging means, said engaging means being substantially rigidly attached to corresponding engaging means of an external housing or casing or frame.

21. (New) An encoder-switch assembly according to claim 1, wherein the switching means is adapted to indicate an electrical connection between a protrusion of the first part of the frame and an electrical conductor or pad positioned in a fixed manner relative to the second part of the frame.

22. (New) An encoder-switch assembly according to claim 1, wherein part of the coding member is integrated with the first member.

23. (New) An encoder-switch assembly according to claim 1, wherein the first member comprises a substantially cylindrically shaped member having part of the coding member formed on an end surface part.

24. (New) An encoder-switch assembly according to claim 7, wherein part of the coding member is provided by arranging between 5 and 25 protrusions along a substantially axially oriented surface path on the end surface part of the substantially cylindrically shaped member.

25. (New) An encoder-switch assembly according to claim 8, wherein the coding member is formed by mounting a metal disc on the end surface part of the substantially cylindrically shaped member, the metal disc comprising between 5 and 25 holes of dimensions essentially equal to the dimensions of the protrusions of the coding member.

26. (New) An encoder-switch assembly according to claim 9, further comprising at least three contact members being adapted to scan the end surface part of the substantially cylindrically shaped member, each contact member having a corresponding leg part.

27. (New) An encoder-switch assembly according to claim 10, wherein the at least three contact members and the corresponding leg parts are constituted by the frame.

28. (New) An encoder-switch assembly according to claim 1, wherein the coding member comprises a disc-shaped member comprising a number of intermittently positioned holes along an axially oriented path of the disc-shaped member, and wherein the detecting means comprises a light emitter positioned in a manner so as to transmit light through the holes of the disc-shaped member to a detector positioned in a manner so as to receive light pulses when the disc-shaped member is rotated.

29. (New) An encoder-switch assembly comprising,
a frame,

a first member supported by the frame and being rotatably and displaceably mounted in relation to the frame, wherein the first member is rotatable in relation to the frame in a first plane, and wherein the first member is displaceable in relation to the frame between an initial position and a displaced position,

JØRGENSEN

5

a resilient element for returning the first member from the displaced position to the initial position,

switching means for indicating when the first member is in the displaced position,

a coding member engaging the first member in a manner so as to rotate when the first member rotates, the coding member being fixedly connected to the frame, and the first member being rotatably mounted in relation to the coding member, means for transferring a rotation of the first member to the coding member, and

means for detecting rotation of the coding member in relation to the frame.

30. (New) An encoder-switch assembly according to claim 13, wherein the transferring means comprises a substantially rigid shaft, a first end of said substantially rigid shaft being connected to the first member in a manner so that the shaft is rotatable in relation the first member in a plane not being parallel to the first plane, a second end of said substantially rigid shaft being connected to the coding member in a manner so that the shaft is rotatable in relation the first member in a plane not being parallel to the first plane.

31. (New) An encoder-switch assembly according to claim 14, wherein part of the shaft at the first end has a predetermined geometrical shape and wherein part of the first member has a corresponding inverse geometrical

JØRGENSEN

6

shape being adapted to receive and engage part of the shaft in a manner so that a rotation of the first member is transferred from the first member to the shaft, when the first member is rotated in the first plane.

32. (New) An encoder-switch assembly according to claim 15, where the corresponding inverse geometrical shape of the first member has dimensions larger than the corresponding outer dimensions of the predetermined geometrical shape of the shaft.


REMARKS

After entry of this amendment, claims 17 -32 are pending in the application. Claims 1 - 16 have been cancelled without prejudice. Claims 17 - 32 have been added in this amendment.

The purpose of this preliminary amendment is to remove multiple dependent claims from the application to reduce filing costs. Consideration of the application as amended is requested. It is submitted that this Amendment places the application in suitable condition for allowance; notice of which is requested.

Respectfully submitted,

Dated: _____

By:  #37275
FOR John A. Castellano
Attorney for Applicant
Registration No. 35,094
(703) 390-3030

Harness, Dickey & Pierce, P.L.C.
P.O. Box 8910
Reston, VA 20195

ABSTRACT OF THE DISCLOSURE

The present invention relates to an electromechanical roller-key assembly of simple and robust construction. The assembly may be integrated in electronic equipment and generate digital control signals in response to an instantaneous change in angular position of a user-operated roller. The roller-key assembly according to the present invention is suitable for being manufactured with very small outer dimensions and with fewer and simpler mechanical parts compared to prior art roller-key assemblies, thereby making the roller-key assembly suitable for a simplified and automated factory assembly.

ENCODER

1

5/PRTS

10018065 107-018065

JPO5 Rec'd PGT/PTO 1 0 DEC 2007

FIELD OF THE INVENTION

5 The present invention relates to encoder-switch assemblies such as electro-mechanical roller-key assemblies that comprise an encoder part and an actuator switch. The encoder part may operate according to magnetic, optical and/or electromechanical principles and may provide one or several electrical output signals indicating the instantaneous change of angular position of a rotating roller or tuning wheel of the encoder part of the encoder-switch assembly.

The encoder-switch assemblies according to the present invention are particularly well adapted for use in mobile phones or, generally, in any type of electronic equipment that will benefit from the very small outer dimensions and simple construction of the encoder-switch assemblies.

BACKGROUND OF THE INVENTION

Electromechanical roller-key assemblies may be used to generate digital control signals in response to a rotation of a roller or tuning knob and to generate an actuator switch signal in response to a depression. Such rollers are known from e.g. mobile phones. However, the mechanical constructions of these known devices have certain drawbacks due to a large number of miniature movable and stationary parts, often including a tiny detent spring element. This large number of separate parts requires a quite complex and labour intensive assembly procedure to assure that all parts are carefully aligned with respect to each other.

Accordingly, there is a need for an encoder-switch assembly of simplified construction with fewer parts compared to prior art assemblies so as to simplify the assembly procedure, reduce the assembly time and, consequently, lower the costs of integrating such encoder-switch assemblies in today's mobile phones and similar compact electronic equipment.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide an electromechanical roller-key assembly of simple and robust construction. The assembly may be integrated in
5 electronic equipment and generate digital control signals in response to the instantaneous change in angular position of a user-operated roller.

It is a further object of the present invention to provide an electromechanical roller-key assembly suitable for being manufactured with very small outer dimensions.
10 Such miniaturisation is a key requirement for applications in e.g. hearing aids, compact mobile phones pagers, medical dispensing devices and similar handheld or body-worn devices, etc.

It is a further object of the present invention to provide an electromechanical roller-
15 key assembly comprising fewer and simpler mechanical parts compared to prior art roller-key assemblies, thereby making the present electromechanical roller-key assembly suitable for a simplified and automated factory assembly.

In a first aspect, the present invention relates to an encoder-switch assembly
20 comprising,

a first member, said first member being supported by a frame and being rotatably mounted in relation to the frame, the frame having a first part and a second part, the first part being adapted to support the first member and being dis-
25 placeable relative to the second part so as to render the first member displaceable in relation to the second part from an initial position to a displaced position,

a coding member engaging the first member in a manner so as to rotate when the first member rotates,
30

means for returning the first member from the displaced position to the initial position,

means for detecting rotation of the coding member in relation to the frame, and

switching means for indicating when the first member is in the displaced position,

5

characterised in that the returning means is made from a plate-shaped resilient material and is constituted by the frame.

Accordingly, a roller-key assembly according to the present invention may be provided with a coding member operating by different sensing principles, such as
10 electromechanical, optical, inductive, capacitive etc. principles.

The frame may be provided in a plate-shaped resilient material e.g. a metallic material of suitable thickness. The first part and the second part of the frame may
15 be separated by one or more indentations to provide regions with higher resiliency compared to regions of the frame abutting the one or more indentations. By attaching the second part to a housing of an apparatus, the frame functions as a torsion bar element when a user depresses the first member in order to activate the switching means. Accordingly, the frame provides a built-in detent spring function-
20 ality.

The switching means may be adapted to indicate the displaced position of the first member by forming an electrical connection between a protrusion of the first part of the frame and an electrical conductor or pad positioned in a fixed manner relative to the second part of the frame and/or relative to the external housing or casing or frame. This has the advantage that it provides a much simpler actuator
25 switch element compared to prior art membrane switches.

The coding member may be integrated with a substantially cylindrically shaped first member by forming a part of the coding member. Said part may be provided
30 by arranging between 5 and 25 protrusions along a substantially axially oriented surface path on an end surface of the cylindrically shaped member.

A disc-shaped metal plate comprising between 5 and 25 holes of dimensions corresponding to the dimensions of the protrusions may be fitted onto the end surface of the first member so as to form a circular and plane encoding disc. The protrusions thus provide a number of non-conducting pads on the encoding disc while the metal areas constitute electrically conducting pads. In this configuration, the intermittently arranged conducting and non-conducting pads may be electrically interconnected by a circular area of the metal plate. The pads and the circular area may be contacted by scanning means comprising a first, a second and a third contact member. The circular area thus provides a conducting path without the intermittent pattern of conduction and non-conducting pads and may be used as an electrical contact path for the third contact member during rotation of the disk.

Each of the contact members may be electrically connected to a corresponding externally accessible pin or terminal. The pins associated with the first and second contact members may each be connected, through a predetermined pull-up resistor, to a voltage supply provided by an electronic apparatus into which the electromechanical encoder is to be integrated. The leg part or pin associated with the third contact member may be directly connected to a ground terminal in the apparatus so that by rotating the encoder disk short circuits and open circuits are intermittently generated between the first pin and the third pin and between the second pin and the third pin. Consequently, on each of the first and the second pin a pulse train is generated that comprises a number of pulses per revolution of the encoding disk proportional to the number of conducting pads arranged on the encoding disk.

25

The rotatably mounted cylindrically shaped first member may function as a user operated roller. The roller may comprise corrugated grooves disposed along a substantially axially oriented surface path on the end of the cylindrically shaped member opposite to the end that comprises the encoding disc. The grooves may be in contact with a spring member formed in the frame and provide a biasing force against the corrugated grooves, thereby providing a user operating the roller with tactile feedback to assist the user in determining the angular rotation of the roller.

30

In a second aspect, the present invention relates to an encoder-switch assembly comprising,

a frame,

5

a first member supported by the frame and being rotatably and displaceably mounted in relation to the frame, wherein the first member is rotatable in relation to the frame in a first plane, and wherein the first member is displaceable in relation to the frame between an initial position and a displaced position,

10

a resilient element for returning the first member from the displaced position to the initial position,

switching means for indicating when the first member is in the displaced position,

15

a coding member engaging the first member in a manner so as to rotate when the first member rotates, the coding member being fixedly connected to the frame, and the first member being rotatably mounted in relation to the coding member,

20

means for transferring a rotation of the first member to the coding member, and

means for detecting rotation of the coding member in relation to the frame.

25

The transferring means may comprise a substantially rigid shaft, a first end of said substantially rigid shaft being connected to the first member in a manner so that the shaft is rotatable in relation the first member in a plane not being parallel to the first plane, a second end of said substantially rigid shaft being connected to the coding member in a manner so that the shaft is rotatable in relation the first member in a plane not being parallel to the first plane.

30

Part of the shaft at the first end may have a predetermined geometrical shape. The first member may have a corresponding inverse geometrical shape being adapted to receive and engage part of the shaft in a manner so that a rotation of the first member is transferred from the first member to the shaft, when the first member is rotated in the first plane.

The dimensions of the corresponding inverse geometrical shape of the first member may be larger than the corresponding outer dimensions of the predetermined geometrical shape of the shaft.

10

BRIEF DESCRIPTION OF THE DRAWINGS

In the following, preferred embodiments of electromechanical roller-key assemblies according to the present invention are described with reference to the accompanying drawings, wherein

15

Fig. 1 shows a cross-sectional view and two perspective views of a first embodiment of an electromechanical roller-key assembly according to the present invention,

20

Fig. 2 is a cross-sectional view of the assembled electromechanical roller-key assembly illustrated in Fig. 1,

Fig. 3 shows four different perspective views of various elements of a third embodiment of an electromechanical roller-key assembly according to the present invention,

25

Fig. 4 illustrates a metal frame which forms part of the electromechanical roller-key assembly shown in Fig. 3, and

30

Fig. 5 illustrates an exemplary electromechanical encoder having a suitable disc-shaped coding member for use in the electromechanical roller-key assembly shown in Fig. 3.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Fig. 1 shows various views of an electromechanical roller-key assembly according to a first preferred embodiment of the invention. A plastic moulded cylindrical roller 101 is rotatably mounted in a supporting frame 102. A detent spring 103 is also mounted on the frame and further attached to or abutting the roller in a manner that allows the roller to return to a rest position after it has been vertically depressed in order to activate a membrane switch 104 which may be positioned below the roller on e.g. a printed circuit board (PCB) 105. The rotation of the roller is transferred to a coding member 201 (Fig. 2) housed in an encoding module 106 by means of a shaft 107 that provides a relatively rigid connection between the roller and the coding member.

Fig. 2 illustrates that predetermined clearance is provided at both ends of the shaft 107, this clearance provides a mechanism that allows the roller 101 to move vertically (in the direction illustrated by arrow 200) without transferring such vertical movement to the encoding module 106. The encoding module 106 and the frame 102 may accordingly be fixed to the same PCB 105 as the membrane switch 104 by directly soldering the three leg parts of contact members 108 (Fig. 1) to corresponding solder pads located on the PCB 105. Consequently, the present embodiment of the invention does not require flexible connection wires or equivalent flexible connecting means in order to transfer electrical signals from the encoding module 106 to detecting circuitry arranged on the PCB 105. Preferably, the electromechanical roller-key assembly also comprised an O-ring 109 (Fig. 1) positioned between the frame 102 and the coding member 201 to seal the encoding module 106 and the coding member 201 from moist and other external contamination.

Fig. 3 shows various elements of an electromechanical roller-key assembly according to another preferred embodiment of the invention. An assembled roller key assembly 350 is also illustrated in a perspective view. A plastic moulded cylindrical roller 101 is rotatably mounted in a metal frame 320. A first end surface of the roller 101 contains a corrugated groove adapted to contact a detention spring pro-

trusion 325 formed in the metal frame 320 when the roller 101 is mounted in the frame 320. A disc-shaped coding member is formed in a second end of the roller 101 by pressing and aligning a number of holes in a metal disc 300 onto a number of corresponding protrusions, which are moulded in the second end of the roller.

- 5 The holes and protrusions may be arranged along a substantially axially oriented surface path relative to an axis of rotation of the coding member. Accordingly, the second end of the member may constitute an encoding disk comprising a number of intermittently arranged conducting and non-conducting pads. By providing the protrusions on the roller 101 with substantially the same height as the thickness of
- 10 the metal disc 300 a plane surface of the coding member may be provided and contacted by scanning means comprising a first, a second and a third contact member, 335, 336, and 340, respectively. The third contact member 336 is formed in the metal frame 320 and thereby electrically connected to it. Thereby, during rotation of the coding member, electrical contact is intermittently established from
- 15 the first and the second contact member, 335 and 340, respectively, to the at least one third contact member and two pulse trains of differing phase with respect to each other may be provided at the leg parts of the first and second contact members by connecting each of the leg parts of the first and second contact member to an appropriate supply voltage through pull-up resistors.

20

The metal frame 320 is preferably manufactured in a single piece of plate-shaped material as illustrated in Fig. 4. The metal frame 320 is divided into a first part (403 and 404) which is adapted to support the roller at its end surfaces, and a second part 322 which can be rigidly mounted in a casing or housing of an apparatus (not

25 shown) in which the roller key assembly is to be integrated.

By providing two indentations, 400 and 401 in Fig. 4, in the metal frame 320 the first part (403 and 404) is made displaceable in relation to the second part 322.

- Accordingly, when the second part 322 is rigidly mounted in an apparatus housing
- 30 and a force is applied to the roller, the first part (and the roller holding the coding member) is displaced from a rest or initial position to an activated position and a torsion spring force is created in the first part so as to return the roller to its rest position when the applied force is removed. Accordingly, the frame itself functions

as a detent spring so that there is no need for a separate spring element. Another advantage of the metal frame is it may further act as a de-coupling element of electrostatic charge that may build up on the roller.

- 5 The displacement of the first part may bring an actuator contact 330 which is integrated with the first part of the metal frame 320 in electrical contact with a electrically conducting pad arranged on e.g. a printed circuit board and positioned below the actuator contact 330. Thereby an actuator switch element is integrated together with the electromechanical roller-key assembly 350 and this switch element
- 10 may provide two level switching signals to a detection circuit in response to a user depressing and releasing the roller.

The first and second contact members 335 and 340 are preferably provided as an integrated part of the metal frame 320. By utilising an insert moulding process, two

15 plastic bearing elements 341 and 342 are attached to the first part of the metal frame. The first and second contact members 335 and 340 must be mechanically and electrically separated from each other and from the metal frame 320 before or after the insert moulding process so as to provide 3 electrically separate contact members. The plastic bearing elements are utilised to mount the roller in a precise

20 predetermined and rotatable manner relative to the metal frame 320 and to the first, second and third contact members.

A mechanical connection in the form of a cross-bar or shaft may be added between elements 403, 404 (Fig. 4) of the metal frame after it has been bend into a

25 U-shape at the marked regions, as illustrated in Fig. 3, thereby providing a frame of improved mechanical stability.

Fig. 5 is a perspective view of a number of separate elements comprised in an exemplary electromechanical encoder unit. A member 502, constituting a first part of

30 the encoder unit, is provided as a single part moulded in a thermoplastic material with or without reinforcement. The member 502 also defines the positions of the non-conducting pads (protrusions) 503 of the encoder unit by means of twelve wedge-shaped protrusions arranged along a substantially axially oriented path

relative to an axis of rotation of the disk. A conducting member 504 which is provided as a circular disk with a centrally located circular aperture 506 constitutes a second part of the encoder unit. This member 504 comprises a number of wedge-shaped apertures 505 adapted to fit into the corresponding protrusions 503 provided in the member 502. The member 504 may be provided by different manufacturing methods such as through insert moulding or through depositing a layer of conductive material in the preferred pattern on the thermo-plastic member 502. The pads are thus arranged as a circular measuring scale between two radial boundaries positioned relatively near to the circumference of the encoding disk, and the circular area may be positioned inside or outside of the circular measuring scale. Thereby, a circular area or path is left without the intermittent pattern of pads so that this path may be used as a contact path for the third contact member during rotation of the disk. The circular aperture 506 is adapted to receive the end part of a shaft 107 that may be operated by a user. Front and rear housing parts 500 and 513, respectively are provided with contact means 512 which provides snap-fit assembly of the housing parts. Furthermore, an inner surface in the rear part 513 is provided with a projection abutting against each of the at least three contact members to provide a contact or bias force between the contact members and the encoding disk.

20

A first electrical conductive terminal or leg part 507 comprises the second contact member (not shown) and a corresponding externally accessible pin 510. Terminal 507, 508 and 509 are, preferably, provided in a solderable material and/or corrosion-resistant material such as copper, silver, gold-coated steel, palladium-nickel, gold-platinum, gold-nickel alloys, etc. Each of the terminals 508 and 509 are also provided with contact members (not shown) and an externally accessible terminal.

25

CLAIMS

1. An encoder-switch assembly comprising,

5 a first member, said first member being supported by a frame and being rotatably mounted in relation to the frame, the frame having a first part and a second part, the first part being adapted to support the first member and being displaceable relative to the second part so as to render the first member displaceable in relation to the second part from an initial position to a displaced position,

10

a coding member engaging the first member in a manner so as to rotate when the first member rotates,

15

means for returning the first member from the displaced position to the initial position,

20

means for detecting rotation of the coding member in relation to the frame, and switching means for indicating when the first member is in the displaced position,

characterised in that:

25 the returning means is made from a plate-shaped resilient material and is constituted by the frame.

2. An encoder-switch assembly according to claim 1, wherein the frame is made from a plate-shaped resilient material.

30 3. An encoder-switch assembly according to claim 2, wherein the first part and the second part of the frame are separated by one or more indentations.

4. An encoder-switch assembly according to claim 2 or 3, wherein the second part of the frame further comprises engaging means, said engaging means being substantially rigidly attached to corresponding engaging means of an external housing or casing or frame.
- 5
5. An encoder-switch assembly according to any of the preceding claims, wherein the switching means is adapted to indicate an electrical connection between a protrusion of the first part of the frame and an electrical conductor or pad positioned in a fixed manner relative to the second part of the frame and/or relative to
- 10 the external housing or casing or frame.
6. An encoder-switch assembly according to any of the preceding claims, wherein part of the coding member is integrated with the first member.
- 15 7. An encoder-switch assembly according to any of the preceding claims, wherein the first member comprises a substantially cylindrically shaped member having part of the coding member formed on an end surface part.
8. An encoder-switch assembly according to claim 7, wherein part of the coding
- 20 member is provided by arranging between 5 and 25 protrusions along a substantially axially oriented surface path on the end surface part of the substantially cylindrically shaped member.
9. An encoder-switch assembly according to claim 8, wherein the coding member
- 25 is formed by mounting a metal disc on the end surface part of the substantially cylindrically shaped member, the metal disc comprising between 5 and 25 holes of dimensions essentially equal to the dimensions of the protrusions of the coding member.
- 30 10. An encoder-switch assembly according to claim 9, further comprising at least three contact members being adapted to scan the end surface part of the substantially cylindrically shaped member, each contact member having a corresponding leg part.

11. An encoder-switch assembly according to claim 10, wherein the at least three contact members and the corresponding leg parts are constituted by the frame.

12. An encoder-switch assembly according to any of claims 1 -5, wherein the coding member comprises a disc-shaped member comprising a number of intermittently positioned holes along an axially oriented path of the disc-shaped member, and wherein the detecting means comprises a light emitter positioned in a manner so as to transmit light through the holes of the disc-shaped member to a detector positioned in a manner so as to receive light pulses when the disc-shaped member is rotated.

13. An encoder-switch assembly comprising,

a frame,

a first member supported by the frame and being rotatably and displaceably mounted in relation to the frame, wherein the first member is rotatable in relation to the frame in a first plane, and wherein the first member is displaceable in relation to the frame between an initial position and a displaced position,

a resilient element for returning the first member from the displaced position to the initial position,

switching means for indicating when the first member is in the displaced position,

a coding member engaging the first member in a manner so as to rotate when the first member rotates, the coding member being fixedly connected to the frame, and the first member being rotatably mounted in relation to the coding member,

means for transferring a rotation of the first member to the coding member, and

means for detecting rotation of the coding member in relation to the frame.

14. An encoder-switch assembly according to claim 13, wherein the transferring means comprises a substantially rigid shaft, a first end of said substantially rigid shaft being connected to the first member in a manner so that the shaft is rotatable in relation the first member in a plane not being parallel to the first plane, a second end of said substantially rigid shaft being connected to the coding member in a manner so that the shaft is rotatable in relation the first member in a plane not being parallel to the first plane.

10

15. An encoder-switch assembly according to claim 14, wherein part of the shaft at the first end has a predetermined geometrical shape and wherein part of the first member has a corresponding inverse geometrical shape being adapted to receive and engage part of the shaft in a manner so that a rotation of the first member is transferred from the first member to the shaft, when the first member is rotated in the first plane.

16. An encoder-switch assembly according to claim 15, where the corresponding inverse geometrical shape of the first member has dimensions larger than the corresponding outer dimensions of the predetermined geometrical shape of the shaft.

20

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
21 December 2000 (21.12.2000)

PCT

(10) International Publication Number
WO 00/77806 A1

- (51) International Patent Classification⁷: H01H 19/00
- (21) International Application Number: PCT/DK00/00298
- (22) International Filing Date: 31 May 2000 (31.05.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PA 1999 00824 10 June 1999 (10.06.1999) DK
- (71) Applicant (for all designated States except US): MICROTTRONIC A/S [DK/DK]; Byleddet 12-14, P.O. Box 289, DK-4000 Roskilde (DK).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): JØRGENSEN, Martin, Bondo [DK/DK]; Lupinhaven 36, DK-2765 Smørum (DK). RAVNKILDE, Søren [DK/DK]; Baltorpvej 101, DK-2750 Ballerup (DK).
- (74) Agent: PLOUGMANN, VINGTOFT & PARTNERS A/S; Sankt Annæ Plads 11, P.O. Box 3007, DK-1021 Copenhagen K (DK).
- (81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (utility model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ENCODER

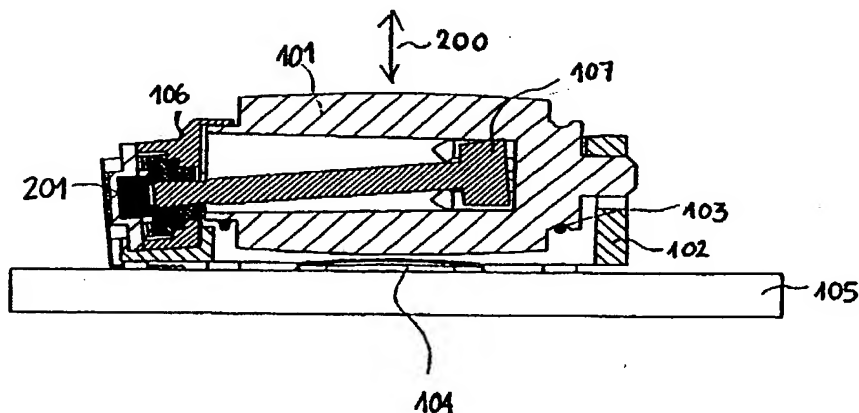

(57) Abstract: The present invention relates to an electromechanical roller-key assembly of simple and robust construction. The assembly may be integrated in electronic equipment and generate digital control signals in response to an instantaneous change in angular position of a user-operated roller. The roller-key assembly according to the present invention is suitable for being manufactured with very small outer dimensions and with fewer and simpler mechanical parts compared to prior art roller-key assemblies, thereby making the roller-key assembly suitable for a simplified and automated factory assembly.



WO 00/77806 A1

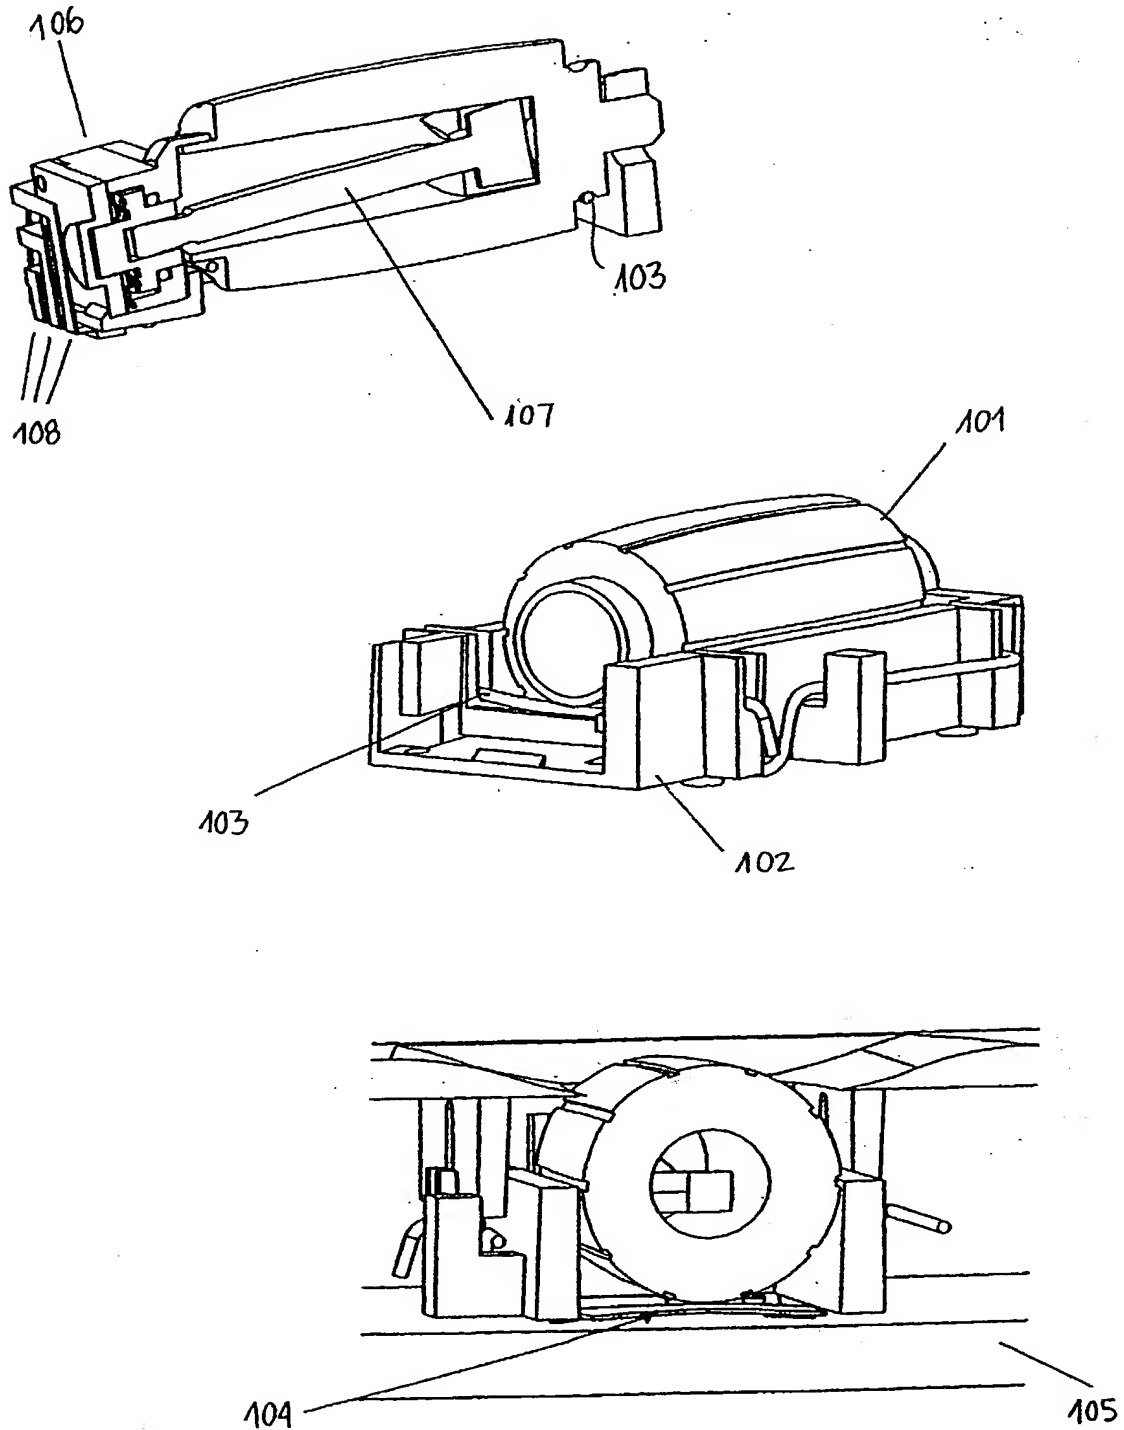
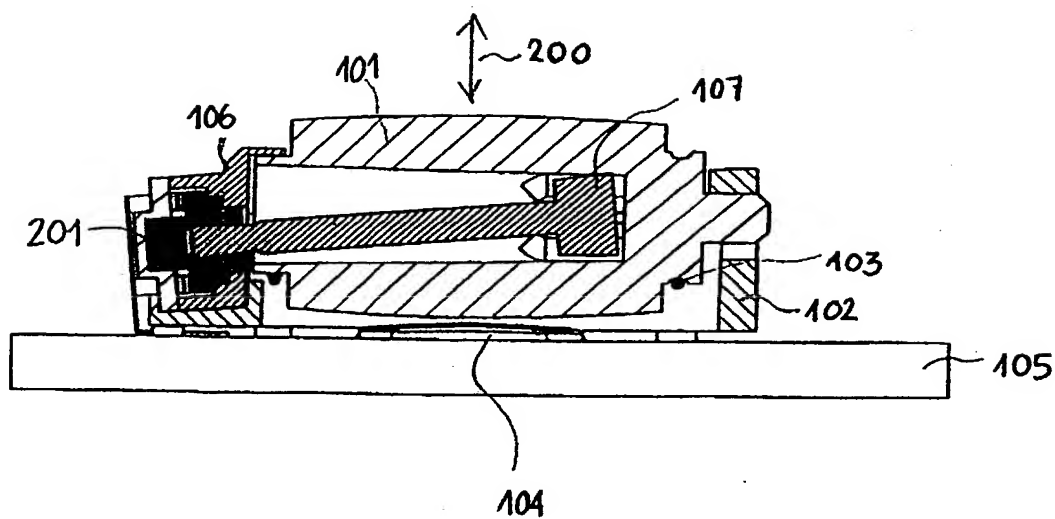


Fig. 1

**Fig. 2**

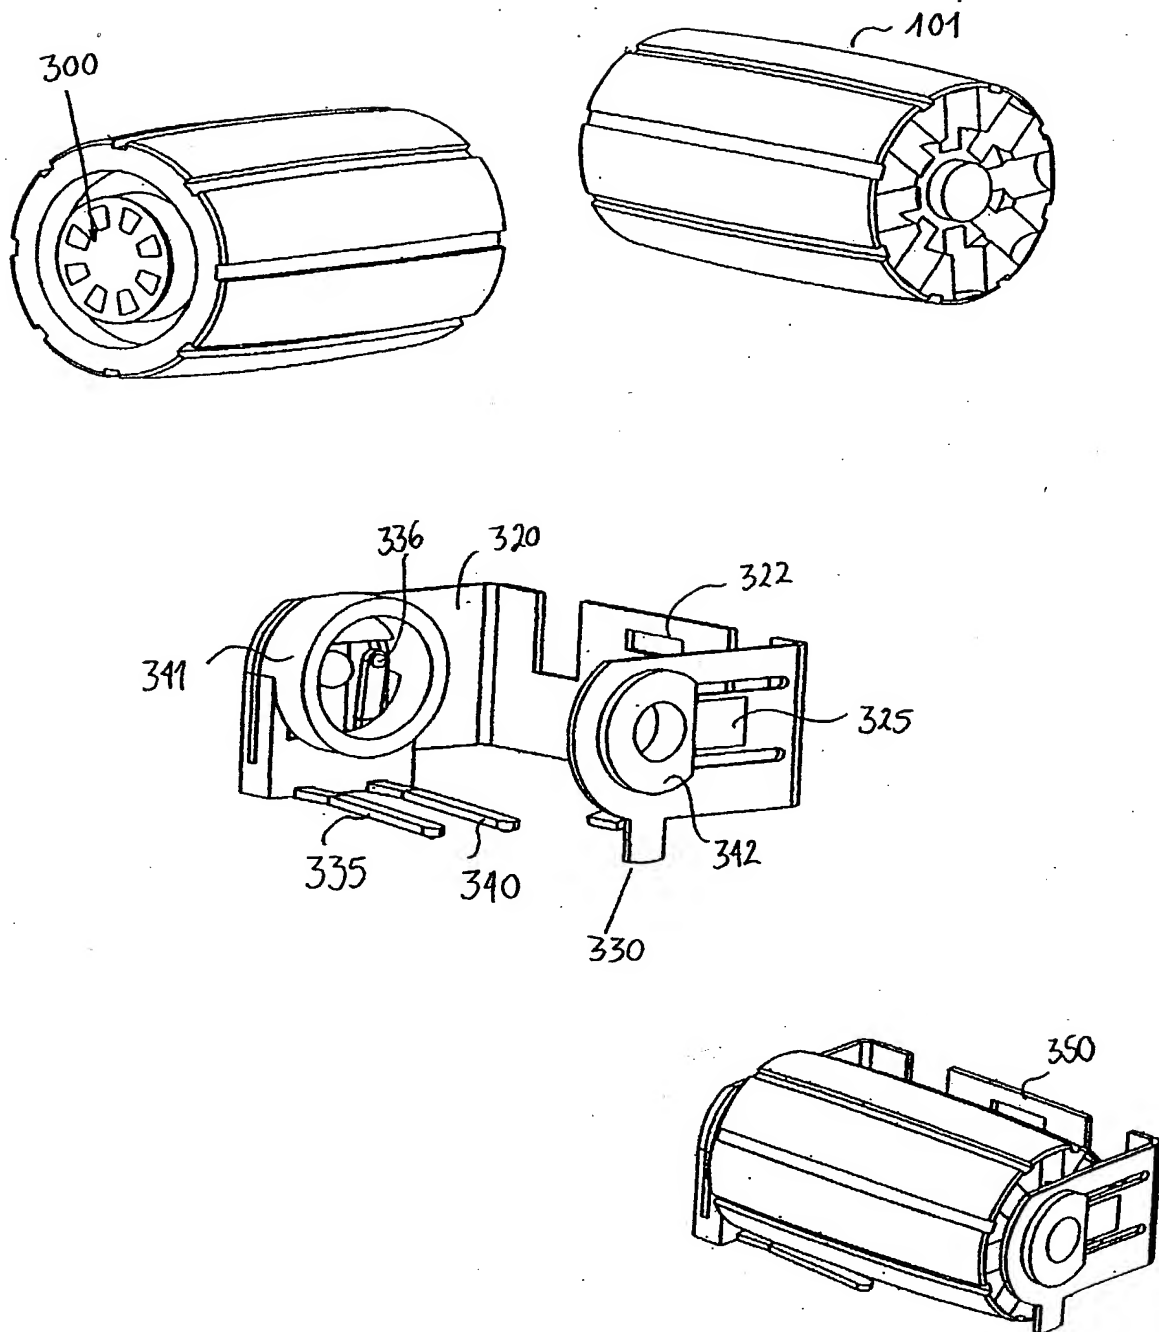


Fig. 3

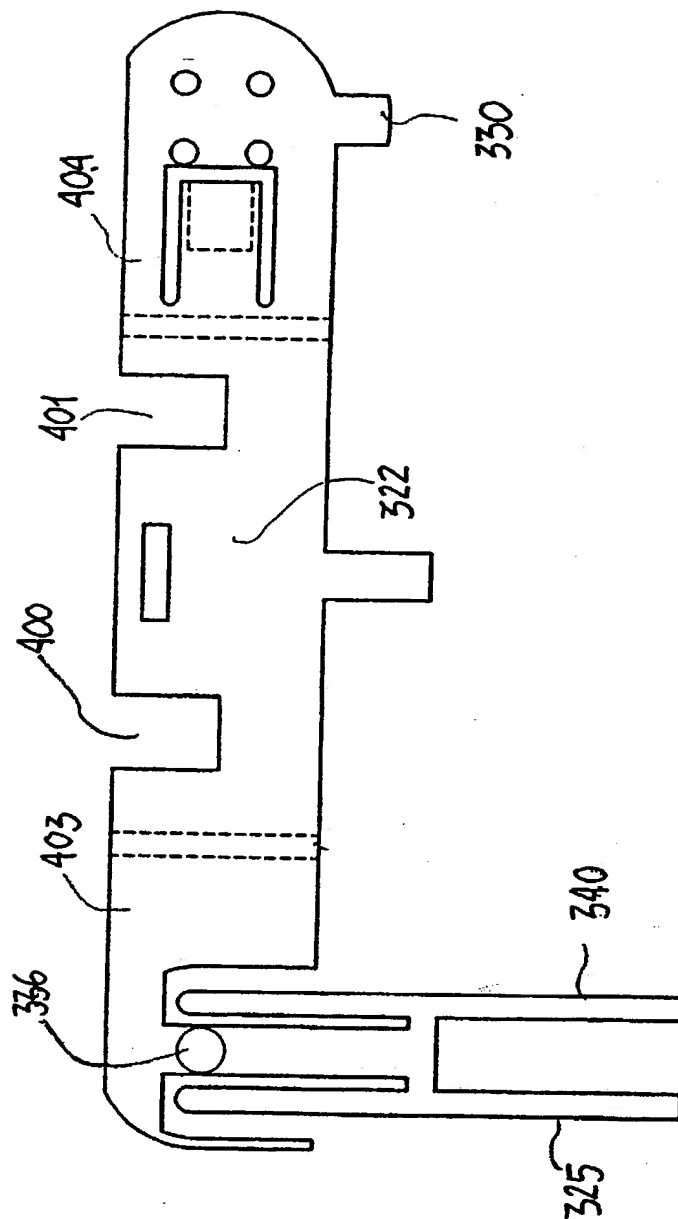


Fig. 4

DECLARATION AND POWER OF ATTORNEY

25 MRS. 2002

Atty. Dkt. No.: 45900-000712/US

DECLARATION

As a below named inventor, I hereby declare that:

My residence, mailing address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

ENCODER

the specification of which (check one)

- ☐ is attached hereto.
or
☒ was filed on 12/21/00 as Application Serial No. or PCT International Application No. PCT/DK00/00298 and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. §§ 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or any PCT international application having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)				
APPN. SERIAL NO.	COUNTRY	DATE FILED (MM/DD/YYYY)	PRIORITY CLAIM	
			Yes	No
PA 00824	DENMARK	06/10/1999	<input checked="" type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>

DECLARATION AND POWER OF ATTORNEY

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

PRIOR PROVISIONAL APPLICATION(S)	
APPN. SERIAL NO.	DATE FILED (MM/DD/YYYY)

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below:

PRIOR U.S. APPLICATION(S)		
APPN. SERIAL NO.	DATE FILED (MM/DD/YYYY)	STATUS - PATENTED, PENDING, ABANDONED

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY

I hereby appoint the following attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Thomas S. Auchterlonie	Reg. No. 37,275
John A. Castellano	Reg. No. 35,094
Terry L. Clark	Reg. No. 32,644
Donald J. Daley	Reg. No. 34,313
Gary D. Yacura	Reg. No. 35,416

DECLARATION AND POWER OF ATTORNEY**CORRESPONDENCE ADDRESS**

I request the Patent and Trademark Office to direct all correspondence and telephone calls relative to this application to Harness, Dickey & Pierce, P.L.C., Customer No. 30593, P.O. Box 8910, Reston, Virginia, 20195, (703) 390-3030.

Full name of sole or first inventor: Martin Bondo Jorgensen

Inventor's signature: [Signature]

Date: 03/25-2002 DKX

Residence: Lupinhaven 36, DK-2765 Smorum, DENMARK

Citizenship: Danish

Mailing Address: Lupinhaven 36, DK-2765 Smorum, DENMARK

Full name of second joint inventor: Soren Ravnkilde

Inventor's signature: [Signature]

Date: 03/25-2002 DKX

Residence: Baltorpvej 101, DK-2750 Ballerup, DENMARK

Citizenship: Danish

Mailing Address: Baltorpvej 101, DK-2750 Ballerup, DENMARK